

This is an electronic version of an article published in Global Change Biology:

Clough T.J., K. Addy, D.Q. Kellogg, B.L. Nowicki, A.J. Gold, and P.M. Groffman.
2007. Dynamics of nitrous oxide in groundwater at the aquatic-terrestrial
interface. *Global Change Biology* 13:1528–1537.

as published in the print edition of *Global Change Biology*, available on the Blackwell
Synergy online delivery service, accessible via the journal's website at
<http://www.blackwellpublishing.com/GCB> or <http://www.blackwell-synergy.com>.

Dynamics of nitrous oxide in groundwater at the aquatic–terrestrial interface

TIM J. CLOUGH*, KELLY ADDY†, DOROTHY Q. KELLOGG†, BARBARA L. NOWICKI†, ARTHUR J. GOLD† and PETER M. GROFFMAN‡

*Soil and Physical Sciences, Agriculture and Life Sciences Division, PO Box 84, Lincoln University, Canterbury, New Zealand,

†Department of Natural Resources Science, University of Rhode Island, 105 Coastal Institute in Kingston, One Greenhouse Road, Kingston, RI 02881, USA, ‡Institute of Ecosystem Studies, 65 Sharon Turnpike, Millbrook, NY 12545, USA

Abstract

Few data are available to validate the Intergovernmental Panel on Climate Change's (IPCC) emission factors for indirect emissions of nitrous oxide (N₂O). In particular the N₂O emissions resulting from nitrogen leaching and the associated groundwater and surface drainage (EF5-g) are particularly poorly characterized. *In situ* push–pull methods have been used to identify the fate of NO₃⁻ in the groundwater. In this study, we adapted a previously published *in situ* denitrification push–pull method to examine the fate of ¹⁵N₂O introduced into the subsoil–groundwater matrix. Enriched ¹⁵N₂O was manufactured, added to groundwater via a closed system in the laboratory, and then introduced into the groundwater–subsoil matrix in an upland-marsh transition zone of a salt marsh and a forested alluvial riparian zone. Conservative tracers (SF₆ and Br⁻) and ¹⁵N₂O were injected into the groundwater and left for 1–4 h after which the groundwater was sampled. Added ¹⁵N₂O behaved in a conservative manner at one site while the other site showed variability with some injections showing significant consumption (3–8 μg N₂O-¹⁵N kg⁻¹ soil day⁻¹) of ¹⁵N₂O. Our results show that the fate and dynamics of N₂O in groundwater are complex and variable and that these dynamics should be considered in the development of improved IPCC inventory calculations.

Keywords: denitrification, IPCC, ¹⁵N, nitrous oxide, SF₆, stable isotope

Received 12 June 2006; revised version received 11 January 2007 and accepted 29 December 2007

Introduction

The atmospheric concentration of nitrous oxide (N₂O) has increased since preindustrial times and continues to do so. The United Nations Framework Convention on Climate Change (UNFCCC) established the Kyoto protocol, which requires participating countries to either reduce or take responsibility for their excess greenhouse gas (GHG) emissions. This necessitates signatories of the Kyoto protocol to develop and publish national inventories of anthropogenic GHG emissions on an annual basis. Guidelines for constructing national inventories have been prescribed by the Intergovernmental Panel on Climate Change (IPCC).

In the IPCC methodology, agricultural sources of N₂O are partitioned into three categories: direct emissions from agricultural land, emissions from animal waste

systems, and indirect emissions associated with nitrogen (N) that is removed in biomass, volatilized, leached, or exported from agricultural land (Mosier *et al.*, 1998). These categories are thought to contribute an equal 1/3 share of the total estimated agricultural N₂O source but with 2/3 of the uncertainty in the total agricultural source due to the wide range of estimates for indirect emissions (Nevison, 2000). Globally, the total agricultural N₂O source equals 6.3 Tg N yr⁻¹ (Mosier *et al.*, 1998) with 2.1 Tg N yr⁻¹ coming from indirect emissions. The predominate sources of the indirect emissions, over 75%, are associated with N leaching and runoff (Mosier *et al.*, 1998; Nevison, 2000). N in leachate and runoff enters groundwater, riparian zones, wetlands, rivers, and oceans.

The IPCC methodology provides estimates of the amount of N leached (NLEACH) based on the amount of N input, assuming a certain fraction (FRACLEACH) of these inputs are lost to leaching and runoff (Mosier *et al.*, 1998). The emissions of N₂O arising from leached

Correspondence: T. J. Clough, fax +64 3 325 3607, e-mail: clought@lincoln.ac.nz

N (i.e. N₂O(L)) are calculated as follows:

$$N_2O(L) = NLAECH \times EF5.)$$

The N₂O emissions resulting from NLEACH are assumed to evolve from: (1) groundwater and surface drainage (EF5-g), (2) rivers (EF5-r), and (3) coastal marine areas (EF5-e). Combined these factors represent the emission factor EF5, thus

$$EF5 = EF5-g + EF5-r + EF5-e$$

The default value for EF5 is 0.025 kg N₂O-N kg⁻¹ NLEACH (Mosier *et al.*, 1998), with component values of 0.015 for EF5-g, 0.0075 for EF5-r and 0.0025 for EF5-e. The value for EF5- is based on observations of super-saturated concentrations of N₂O in drainage waters due to leaching of N₂O from soil toward groundwaters, or production of N₂O in the groundwater via nitrification or denitrification, and the idea that this N₂O eventually degasses to the atmosphere. In contrast with direct emissions, there are very few data available to validate the IPCC emission factors for indirect emissions (Groffman *et al.*, 2002). The IPCC model for estimating N₂O emissions from groundwater is highly uncertain because the controls on both N₂O production and consumption in groundwater are not well understood. Nevison (2000) noted that the default value for EF5-g was based on a literature review of only six studies and concluded that the EF5-g default factor should perhaps be reduced to a value of 0.001. More recent studies have also highlighted uncertainties with the magnitude of the default factors that comprise the EF5. (Reay *et al.*, 2003; Clough *et al.*, 2006). We are not aware of any published studies that have tried to determine the potential for reduction of N₂O in groundwater. It is clear that further studies are needed to examine the fate of N₂O in groundwater.

In situ push–pull methods have been used to study the fate of nitrate (NO₃⁻) and its potential denitrification rate in the subsoil–groundwater matrix (Istok *et al.*, 1997; Addy *et al.*, 2002), yet there has been no analysis of the fate of intermediate denitrification end-products such as N₂O. Addy *et al.* (2002) used a tracer gas (sulfur hexafluoride, SF₆) as a conservative tracer in their push–pull studies, suggesting that gases could be successfully traced with these methods. Few studies have directly measured N₂O consumption rates in soils (Kroeze *et al.*, 1989; Hénault *et al.*, 2001; Mei *et al.*, 2004) let alone the vadose zone. The use of ¹⁵N labeled NO₃⁻ can be used to determine the rate of N₂O production. However, the determination of ¹⁵N₂O consumption rates is hampered by ongoing production of ¹⁵N₂O from the ¹⁵NO₃⁻ pool. Thus, only a net measure of N₂O is achieved i.e. the difference between production and consumption of N₂O. To accurately determine ¹⁵N₂O consumption rates

there is a need to decouple the production of ¹⁵N₂O from the ¹⁵NO₃⁻ pool. Clough *et al.* (2005) recommended the use of ¹⁵N₂O as a starting substrate in order to better identify the fate of the N₂O molecule. The introduction of ¹⁵N₂O into the subsoil–groundwater matrix, along with a conservative tracer, could potentially provide data on the fate and production of N₂O belowground. Thus, the objectives of this study were to adapt the *in situ* push–pull method of Addy *et al.* (2002) to allow the introduction of dissolved ¹⁵N₂O into the subsoil–groundwater matrix and to assess the potential for ¹⁵N labeled N₂O consumption at two sites with differing denitrification potentials.

Materials and methods

Study sites and piezometers

Site A was located on the tidally influenced Brushneck Cove of Narragansett Bay, Warwick, RI (41°41'N, 71°24'W) and has been previously described in detail by Addy *et al.* (2005). In brief, the site was situated in the transition area between a salt marsh and an upland area with an average slope of 10%. There was no organic horizon present and tidal inundation is rare at this site. The soil was classified as a mixed Mesic Typic Psammequents (Soil Survey Staff, 1998) with vegetation dominated by marsh elder (*Iva frutescens* Pursh var. *oraria*), sea lavender (*Limonium carolinianum*), and seaside goldenrod (*Solidago sempervirens* L.).

A second-order tributary of the Pawcatuck river, 'Meadow Brook,' situated in Richmond, RI (41°29'N, 71°41'W) was the location of site B, previously described in detail by Kellogg *et al.* (2005). Briefly, this site was situated on an alluvial soil classified as a coarse-loamy Mesic Fluvaquentic Endoaquept (Soil Survey Staff, 1998), 7 m from the stream, with vegetation dominated by red maple (*Acer rubrum* L.), highbush blueberry (*Vaccinium corymbosum* L.), and summersweet (*Clethra alnifolia*).

Five years before this study, mini-piezometers [0.8 cm OD; 2 cm screen length (AMS, American Falls, ID, USA)] attached to Teflon tubing (0.7 cm OD) were installed at both field sites. One additional piezometer was installed at site B (replicate 1) immediately before the study, giving a total of three piezometers at each site. Details of the piezometer installation methodology have been reported on previously (Addy *et al.*, 2002). The piezometers at sites A and B were at depths of 125 and 65 cm, respectively, with respective groundwater tables at depths of 90 and 50 cm. Piezometers at site A were 4 m apart while at site B the piezometers were 5 m apart.

Groundwater extraction, ¹⁵N₂O labeling, and dosing

Groundwater was extracted from the piezometers at sites A and B using a Masterflex L/S portable peristaltic pump (Cole Parmer, Vernon Hills, IL, USA). This water (10 L aliquots) was brought from the field in plastic carboys and stored overnight at 4 °C until it was labeled with SF₆. Labeling with SF₆ was achieved by purging the water with an SF₆ gas mixture (100 μL L⁻¹ SF₆ in He; Med-Tech, Medford, MA, USA) via a sparge stone for 15 min. This also served the purpose of lowering dissolved oxygen (DO) concentrations to ambient levels as noted by Addy *et al.* (2002). Immediately after this, 2 L aliquots of the SF₆-dosed water were decanted into 2 L volumetric flasks and sealed with a Suba-seal. A 5 mL volume of potassium bromide (KBr) solution was then injected into the dose water within each 2 L volumetric flask to achieve a Br⁻ tracer concentration of 33 mg L⁻¹.

Water was then labeled with ¹⁵N₂O that had been previously prepared in the laboratory by adding ¹⁵N labeled ammonium nitrate (NH₄¹⁵NO₃, min. 98 + atom% ¹⁵N, Sigma Aldrich, Auckland, New Zealand, Category No. 366536) to unenriched NH₄NO₃ and distilled water to form a well-mixed uniform salt solution containing NH₄¹⁵NO₃ (34 atom% ¹⁵N excess relative to N₂ in air). This solution was then dried at 80 °C to an NH₄¹⁵NO₃ salt. The NH₄¹⁵NO₃ was then weighed out and placed in glass tubes, sealed and baked at 300 °C according to Friedman & Bigeleisen (1950) generating N₂O. The mass of NH₄¹⁵NO₃ used was adjusted so that the internal pressure inside the glass tubes did not exceed 2 atm. One glass tube was prepared for each dosing event per piezometer. The resulting N₂O used in dosing the groundwater was enriched in ¹⁵N, 34.0 atom% ¹⁵N excess relative to N₂ in air [standard error of the mean (SEM) equaled 0.3, *n* = 9].

Labeling of the water with ¹⁵N₂O was achieved by scoring the glass tube that contained the ¹⁵N₂O with a metal file and placing it inside a silicone tube (12.8 mm ID, 2.4 mm wall thickness, Cole Parmer, Vernon Hills, IL, USA: EW-06411-19) that had been stored in a freezer such that one end of the silicone tube was already plugged with a 3 cm length of previously frozen deionized water. The open end of the silicone tube was then capped with a silicone turn-over flange stopper (12.7 mm diameter; Saint-Gobain Verneret, Charny, France: 467013-50). Working rapidly, the Suba-seal was then removed from the 2 L flask, the sealed silicone tube was then bent so that the internal glass tube snapped at the scored mark, releasing ¹⁵N₂O inside the silicone tube. The silicone tube was then placed into the 2 L flask and the Suba-seal repositioned to seal the flask. Within minutes the ice plug inside the silicone tube melted and released the ¹⁵N₂O into the dose water. The flask was

gently shaken by hand for 2–3 min and then left overnight (12 h) at 4 °C for gases to equilibrate.

The 2 L flasks containing the dose water were transported to the field sites in coolers. At the field sites, the water table depth was recorded prior to pumping 1 L of water from the well. This was discarded before a further 150 mL ambient predose water sample was taken and placed in a nalgene screw-top bottle. These predose samples were transported back to the laboratory in a cooler and stored at 4 °C before chemical analysis. DO in the groundwater was measured on site using a portable DO kit (La Motte, Maryland, BA, USA). The dose water was then readied to be pumped into the piezometers. This was achieved by quickly swapping the Suba-seal on the flask with a rubber stopper fitted with stainless steel (SS) (6 mm OD, 4 mm ID) and copper (3 mm OD, 2 mm ID) tubes. The SS tube was the outlet port for the dose water and was connected to C-Flex tubing (4.8 mm ID; Cole Parmer HV-06424-15) that was then routed through the peristaltic pump to the air tight SS-sampling apparatus (Addy *et al.*, 2002) that was in turn connected to the Teflon tube of the piezometer head (Fig. 1). The copper tubing was attached to a 10 L Tedlar bag filled with He at atmospheric pressure (Fig. 1). Helium entered the flask as the dose water was pumped out, thus preventing a vacuum being created inside the flask, which could lead to rapid degassing of the gases of interest from the dose water and/or the possible implosion of the flask. As the dose water was pumped (8 L h⁻¹) into the well a subsample was taken of the dose water as follows. The first 20 mL of the dose water pumped was discarded to waste with the following 20 mL collected in a gas tight syringe fitted with a two-way stop-cock using the gas tight SS-sampling apparatus. Using this apparatus the pumped water flow could be directed either toward a luer-lok fitting attached to a gas syringe or to the well head. This water sample was then injected into a pre-evacuated (-0.93 atm.) 160 mL serum bottle sealed with a rubber suba-seal. The serum bottle was inverted so that the water sample covered the septa. Then He gas from a Tedlar bag, was released into the inverted serum bottle via a hypodermic needle until atmospheric pressure was attained, as indicated by the cessation of bubbles coming from the hypodermic needle connected to the He supply. Water samples were then transported back to the laboratory in a cooler and kept at 4 °C until analysis, within 24 h.

After the dose water had been pumped into the soil-groundwater matrix it was left to incubate for a total time of 1.5 and 4.3 h at sites A and B, respectively. These incubation times were based on previously measured denitrification rates and tracer recoveries at these sites (Addy *et al.*, 2002; Kellogg *et al.*, 2005). Following the

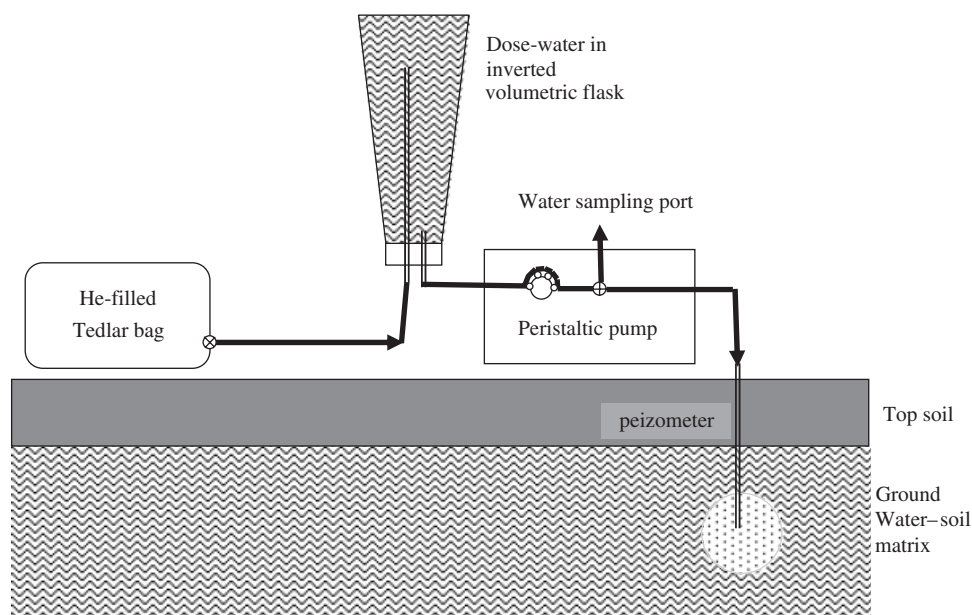


Fig. 1 A schematic diagram of the field experimental set up. Showing the dose water flask connected to the He replacement gas and the peristaltic pump in the dose position. During sampling the peristaltic pump was positioned on the other side of the water sampling port.

incubation period the dose water was slowly 'pulled' out of each peizometer, using the peristaltic pump (6 L h^{-1}). Samples of the extracted groundwater were taken and treated in an identical manner to the water samples previously described. Six samples were taken from each piezometer when the cumulative volume of water extracted reached 0.22, 0.46, 0.70, 0.94, 1.48, and 2.02 L. Site A was dosed and sampled once, on August 19, 2005, while site B was dosed and sampled on two occasions, August 22 and 29, 2005. These sampling dates at site B are subsequently referred to as site B test-1 and site B test-2, respectively.

Analytical procedures

The headspaces of the serum bottles containing the water samples were analyzed for N₂O and SF₆ concentrations within 12 h. The bottles were brought to room temperature (22 °C) over 1 h, which reduced the ability of the water sample to contain dissolved gases and enhanced the concentration in the headspace. The serum bottles were then shaken vigorously for 1 min to bring water and headspace gases to equilibrium. A 0.1 mL gas sample was then taken and manually injected directly into a Hewlett Packard (Houston, TX, USA) 5890 gas chromatograph (GC) equipped with an electron capture detector (350 °C) fitted with a 5.5 m Poropak Q 50/80 mesh column, N₂ carrier gas and a make up gas consisting of Ar (95%) and CH₄ (5%). Retention times for N₂O and SF₆ were 10.5 and 13.7 min, respectively. Reference gas samples were made from

gas bottles of known concentration (Med-tech., Meford, MA, USA). A further 15 mL gas sample was also taken from the headspace of the serum bottle, using a 20 mL glass syringe equipped with a three-way tap to prevent the ingress of atmospheric air, and placed in a pre-evacuated 12 mL Exetainer[®] (Labco Ltd, High Wycombe, UK). This sample was used for determining the ¹⁵N enrichment, of the N₂O using an automated isotope ratio mass spectrometer (PDZ-Europa Ltd. 20–20, Crewe, UK) as described by Stevens *et al.* (1993). These gas samples were brought to ambient pressure before analysis by using a double-ended needle and a beaker of water. One needle was consistently placed at a constant depth in the water while the other pierced the Exetainer[®]. Upon the cessation of gas bubbles entering the water, the sample was considered to be at atmospheric pressure. The N₂O reference gas (BOC gases) had an ¹⁵N enrichment equal to 0.02122 atom% ¹⁵N excess relative to ambient N₂ in air.

Concentrations of the N₂O and SF₆ in the water samples were calculated using the headspace gas concentrations, appropriate Bunsen coefficients (Wilhelm *et al.*, 1977; Weiss & Price, 1980) and the equations of Davidson & Firestone (1988). Once headspace gas samples had been taken, the water samples were returned to the 4 °C cooler until the analysis for Br⁻ was performed as described below.

Water samples were analyzed for dissolved organic carbon (DOC), pH, electrical conductivity (EC), Br⁻, sulfate (SO₄²⁻), chloride (Cl⁻), and NO₃⁻ concentrations. Groundwater pH was measured in the field with a hand

held meter (Mettler Toledo, Greifensee, Switzerland). The DOC analyses were performed on a Shimadzu organic carbon analyzer fitted with a Shimadzu ASI-5000A autosampler (Shimadzu Scientific Instruments, Columbia, MD, USA). Water sample EC was determined with a conductivity meter at 25 °C (Hanna Instruments, Woonsocket, RI, USA). Ammonium analyses were performed using a flow injection analyzer (Alpkem FS3000 twin channel analyzer, Pulse Instrumentation Ltd, Saskatoon, Canada; application notes P/N A002380 and P/N A002423). Anion analyses were performed using an ion chromatograph (Dionex DX-120 with an AS50 autosampler, Sunnyvale, CA, USA).

Reduction rates of $^{15}\text{N}_2\text{O}$, were calculated using the method described by Addy *et al.* (2002). These calculations utilized data from the water samples pulled at 0.22 and 0.46 L and are based on the difference in N_2O concentration and ^{15}N enrichment between the two water samples. Assumptions included a soil bulk density of 1.65 kg m^{-3} and a porosity of $0.38 \text{ m}^3 \text{ pores m}^{-3}$ soil, as previously reported for this site (Kellogg *et al.*, 2005). Statistical analyses were performed using MINITAB[®] statistical software (Minitab, 2000).

Results

Ambient groundwater concentrations of NO_3^- , NH_4^+ , and Br^- were low or undetectable at both sites (Table 1). The groundwater at site B contained more DOC ($P < 0.01$) and lower DO ($P < 0.01$) than site A. Dissolved SO_4^{2-} concentrations were higher at site A ($P < 0.01$) than site B, while Cl^- concentrations did not differ between sites (Table 1). Salinity at site A was four times higher than at site B (Table 1), a reflection of groundwater mixing with sea water that had infiltrated the aquifer in the transition zone, producing groundwater of intermediate salinity (Moore, 1999). Ambient N_2O concentrations in the groundwater averaged $4 \mu\text{g L}^{-1}$ (Table 1) and were above saturation ($0.6 \mu\text{g L}^{-1}$), with ambient $^{15}\text{N}_2\text{O}$ enrichments at site A and B of 0.203 and 0.295 atom% ^{15}N excess (relative to ambient N_2 in air), respectively. Ambient dissolved CH_4 concentrations were significantly higher ($P < 0.01$) at site B (Table 1).

When averaged across all nine push-pull tests that were performed the mean (SEM, $n = 9$) Br^- and SF_6 concentrations in the initial dose solutions were $33.2 (0.6) \text{ mg L}^{-1}$ and $1.5 (0.1) \mu\text{g L}^{-1}$, respectively. Initial concentrations of dissolved N_2O in the dose water were well in excess of ambient concentrations and averaged (SEM, $n = 3$) $150 (44)$, $65 (12)$, and $70 (44) \mu\text{g L}^{-1}$ for site A, site B test-1, and site B test-2, respectively. The mean ^{15}N enrichment of the N_2O gas in the initial dose solutions was as noted above 34.0 atom% ^{15}N excess relative to N_2 in air.

Concentrations of CH_4 in the ambient water at sites A, site B test-1, and site B test-2 were $5 (1)$, $415 (120)$, and $333 (154) \mu\text{g L}^{-1}$, respectively, (SEM, $n = 3$). At site B the CH_4 concentrations in replicate three were much lower than in replicates one and two, leading to high variability at this site. Immediately before 'pushing' the mean (SEM, $n = 3$) dose water contained CH_4 concentrations of $3 (1)$, $12 (1)$, and $10 (4) \mu\text{g L}^{-1}$ at sites A, site B test-1, and site B test-2, respectively.

After incubation of the pushed dose water in the soil-groundwater matrix the dose-water was withdrawn. There was one particular well where equal volumes of gas were withdrawn along with the water sample during the pull phase of the test. This was at site B, replicate 3, during both tests.

The relationship between C/C_o , where C is the pulled groundwater concentration and C_o is the original pushed groundwater concentration, and V/V_t , where V is the cumulative volume pulled and V_t is the total volume of water pushed, was plotted for Br^- at site A

Table 1 Site characteristics and ambient chemical conditions at sites A (a transition area between a salt marsh and the upland area with tidal inundation a rare event with the soil classified as a mixed Mesic Typic Psammequents, Soil Survey Staff 1998) and B (situated on a forested alluvial soil classified as a coarse-loamy Mesic Fluvaquentic Endoaquapt, Soil Survey Staff, 1998, 7 m from a stream)

Site characteristics	Site A: Warwick	Site B: Meadow Brook
Depth of mini-peizometers (cm)	125	65
Water-table depth (cm)	90	50
Ground water temperature (°C)	12	13
Dissolved oxygen (mg L^{-1})	3.2	<1
Dissolved organic carbon (mg L^{-1})	2.2 (0.2)	9.1 (1.4)
CH_4 ($\mu\text{g L}^{-1}$)	5 (1)	333 (154)–415 (120)
N_2O ($\mu\text{g L}^{-1}$)	4.0 (0.4)	4.1 (0.2)
$\text{NO}_3\text{-N}$ (mg L^{-1})	0	0
$\text{NH}_4\text{-N}$ (mg L^{-1})	0.07 (0.02)	0.06 (0.03)
Br^- (mg L^{-1})	0.07 (0.03)	0.27 (0.11)
Cl^- (mg L^{-1})	7.1 (0.5)	6.3 (0.5)
$\text{SO}_4^{2-}\text{-S}$ (mg L^{-1})	3.8 (0.2)	0.8 (0.2)
$\text{PO}_4^{3-}\text{-P}$ (mg L^{-1})	< 0.1	<0.1
Electrical conductivity (mS m^{-1})	20.3	5.6
Soil texture	Fine sand	Coarse-loamy alluvium

Further site details are presented in the text.

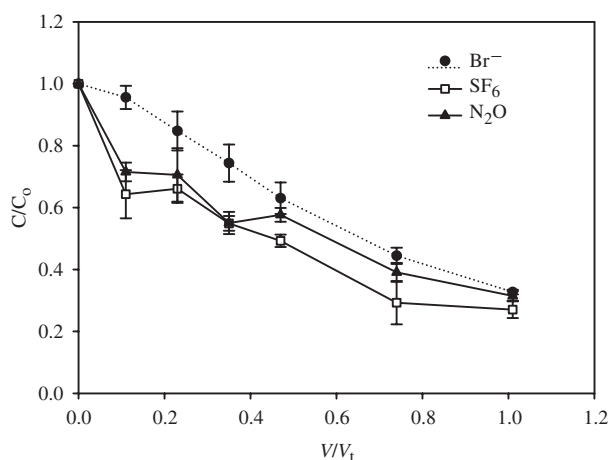


Fig. 2 Relationship between C/C_0 and V/V_t at site A, for bromide (Br^-), nitrous oxide (N_2O) and sulfur hexafluoride (SF_6). The ratio C/C_0 is the ratio of the pulled ground water concentration (C) to the original pushed dose water concentration (C_0). The ratio V/V_t is the cumulative volume pulled (V) to the total volume of the pushed water (V_t). Error bars are the standard error of the mean ($n = 3$).

(Fig. 2) and site B (Fig. 3a–c). Recovery of the conservative Br^- tracer, averaged (SEM, $n = 3$) over the three piezometers, was 64 (4)%, 67 (6)%, and 67 (3)% for the push–pull tests at site A, site B test-1 and site B test-2, respectively (SEM in brackets, $n = 3$). The concentration of Br^- in the recovered pull samples had decreased to an average (SEM) 10.7 (0.6) mg L^{-1} in the final aliquot of the pull phase.

The conservative tracer SF_6 behaved in a similar manner to the Br^- anion (Figs 2 and 3a–c) but with lower average (SEM, $n = 3$) recoveries, 60 (1)%, 58 (11)%, and 65 (5)% for the push–pull tests at site A, site B test-1, and site B test-2, respectively. Of note however was the divergence between the two conservative tracers at site B, replicates 2 and 3, which was in contrast to site A and replicate 1 at site B. The recovery of N_2O , based upon C/C_0 , was extremely variable and averaged (SEM, $n = 3$) 55 (3)%, 63 (36)%, and 57 (17)% for the push–pull tests at site A, site B test-1 and site B test-2, respectively. This variability was due to both intersite variability, between sites A and B, and intrasite variability at site B. At site A the mean N_2O C/C_0 values closely tracked those of the mean C/C_0 values for the conservative tracers (Fig. 2). At site B, replicate 1 behaved in a conservative manner, similar to site A with N_2O C/C_0 values closely tracking the conservative tracers Br^- and SF_6 (Fig. 3a). However, in replicate 2 at site B the N_2O C/C_0 values decreased rapidly with respect to the conservative tracers during both tests (Fig. 3b) while for replicate 3 the N_2O C/C_0 values

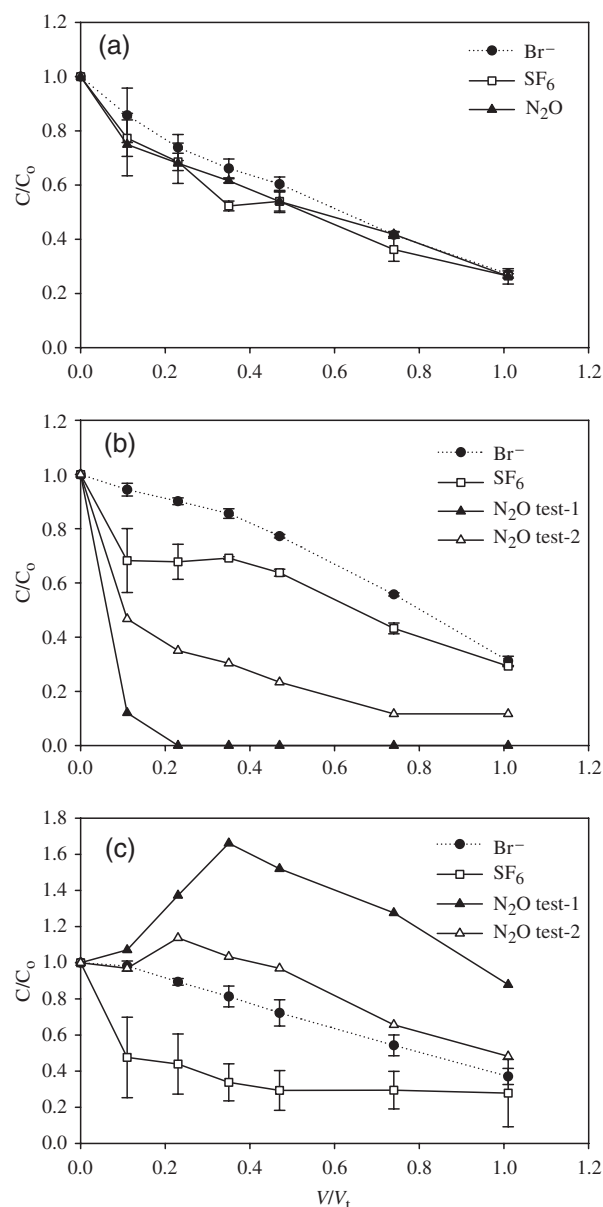


Fig. 3 Relationship between C/C_0 and V/V_t at site B, for bromide (Br^-), nitrous oxide (N_2O) and sulfur hexafluoride (SF_6). The ratio C/C_0 is the ratio of the pulled ground water concentration (C) to the original pushed dose water concentration (C_0). The ratio V/V_t is the cumulative volume pulled (V) to the total volume of the pushed water (V_t). Graphs (a–c) represent replicates 1–3, respectively. Replicates 1–3 produced varying N_2O results but consistent Br^- and SF_6 results. In graphs (a–c) the data points for the SF_6 and Br^- are the means of both tests 1 and 2 ($n = 2$) with error bars the standard error of the mean. Similarly in graph (a) the N_2O data points are the mean ($n = 2$) of both tests 1 and 2 with error bars the standard error of the mean. However, in graphs (b) and (c) N_2O data points are from individual tests as noted in the legend.

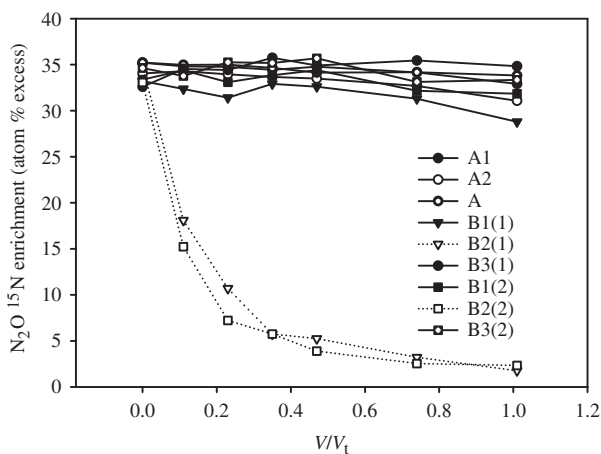


Fig. 4 Relationship between the N_2O ^{15}N enrichment (atom% ^{15}N excess relative to ambient N_2 in air) of the sampled waters and V/V_t is shown for each of the nine dosings that were performed, where V is the cumulative volume pulled and V_t is the total volume of the pushed water. Data points are from individual replicates. Legend shows site (A or B) with the following numeral indicating the replicate while the numeral in brackets indicates either test 1 or test 2 at site B.

increased over and above those of the conservative tracers for both tests. N_2O concentrations in the final water sample withdrawn averaged (SEM, $n = 3$) 46 (13), 25 (15), and 32 (10) $\mu\text{g L}^{-1}$ for sites A, B test-1 and B test-2, respectively.

There was no significant decrease in the ^{15}N enrichment of the N_2O during incubation for all replicates at site A and for replicates 1 and 3 at site B (Fig. 4). However, for replicate 2 at site B the ^{15}N enrichment of the N_2O decreased exponentially in both dosings, as V/V_t increased, to a mean of 1.634 atom% ^{15}N excess relative to N_2 in air (Fig. 4).

Denitrification rates, i.e. the N_2O reduction rates, were only determined where N_2O concentrations decreased significantly, (i.e. for site B, replicate 2, and equated to 8 and 3 $\mu\text{g N}_2\text{O-}^{15}\text{N kg}^{-1}$ soil day $^{-1}$ for tests 1 and 2, respectively).

Dissolved CH_4 concentrations in the pulled samples varied between sites (Fig. 5) with concentrations in the final aliquots sampled of 3 (1), 256 (37), and 199 (33) $\mu\text{g L}^{-1}$ for sites A, site B test-1, and site B test-2, respectively. Thus, there was no significant change in the C/C_o ratio for dissolved CH_4 at Site A. However, at site B the dissolved CH_4 concentrations increased significantly as the cumulative volume of water pulled increased (Fig. 5), although these concentrations were still below ambient levels recorded at the start of the experiment.

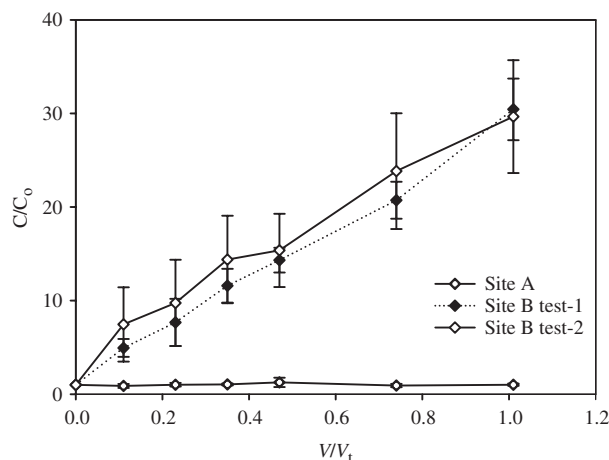


Fig. 5 Relationship between C/C_o and V/V_t for dissolved methane (CH_4) from site A to site B during tests 1 and 2. C is the pulled ground water CH_4 concentration, C_o is the original pushed dose water CH_4 concentration, V is the cumulative volume pulled and V_t is the total volume of the pushed water. Data points are the average of three replicates with error bars the standard error of the mean.

Discussion

There are several possible fates for N_2O injected and incubated in the subsoil-groundwater matrix in terms of both concentration and ^{15}N enrichment (Table 2). These fates range from conservation of the added N_2O , [i.e. C/C_o behaves in a similar manner as the conservative tracers over time, with constant N_2O ^{15}N enrichment (scenario A, Table 2), to a decrease in both the N_2O C/C_o ratio and its ^{15}N enrichment (scenario E, Table 2)].

The data from sites A and site B, replicate 1, show that the N_2O concentration behaved in a conservative manner with no significant decrease in the ^{15}N enrichment of the N_2O (Fig. 4), (i.e. scenario A in Table 2). We know that the ambient groundwater contained some antecedent N_2O but the N_2O concentration of this groundwater was insignificant when compared with the added ^{15}N labeled N_2O . Therefore, hydrodynamic dispersion or advective groundwater flow that occurred, either during the actual dosing event or during the incubation period, did not significantly affect the N_2O ^{15}N enrichment. Had we used a lower concentration of N_2O or ^{15}N enrichment in our original dose water then we may have observed a significant decrease in ^{15}N enrichment.

For site B, replicate 2, we observed a different result with both the N_2O concentration and ^{15}N enrichment decreasing more rapidly than the conservative tracers. This leads us to consider scenario E in Table 2 where a decrease in ^{15}N enrichment must be due to either an advective influx or *in situ* production of N_2O . While

Table 2 Possible scenarios for changes in the N₂O concentration and its ¹⁵N enrichment, in the recovered dose-water

Scenario	Initial ¹⁵ N enrichment	C/C _o for N ₂ O relative to tracer	Potential reason(s)
A	Maintained	Conservative	No ¹⁵ N ₂ O reduction occurring No advective influx of ambient N ₂ O or <i>in situ</i> N ₂ O production
B	Maintained	Decreasing over time	¹⁵ N ₂ O reduction occurring No advective influx of ambient N ₂ O or <i>in situ</i> N ₂ O production
C	Decreasing with time	Increase over time	Ambient N ₂ O input rate(s) (advective influx or <i>in situ</i> production) > reduction rate of incubated ¹⁵ N ₂ O
D	Decreasing with time	Conservative	Ambient N ₂ O input rate(s) (advective influx or <i>in situ</i> production) equal reduction rate of incubated ¹⁵ N ₂ O
E	Decreasing with time	Decreasing over time	Ambient N ₂ O input rate(s) (advective influx or <i>in situ</i> production) < reduction rate of incubated ¹⁵ N ₂ O

The assumption is made that the associated tracers (SF₆ and Br⁻) shows good recovery in all cases, behaving in a conservative manner.

a higher advective flux is possible at this replicate, a comparison of the recovery of the conservative tracers at site B replicates 1 and 2 suggests that groundwater conditions were similar between these two replicates and that *in situ* denitrification was responsible for both the depletion of the ¹⁵N₂O enrichment as well as the overall decline in the N₂O concentration. Site B, replicate 2, appears to be a relative 'hot-spot' for denitrification. We assume N₂O production did not occur via nitrification due to the low DO concentrations and the lack of any measured NH₄⁺ substrate. This assumption could easily be verified by using ¹⁵NH₄⁺ as a substrate in future studies.

At site, B replicate 3, we observed marked increases in N₂O concentration, (i.e. C/C_o, increases, but the ¹⁵N enrichment of the N₂O remained constant). The increase in N₂O concentration would suggest that active net production of N₂O was occurring, but the constant ¹⁵N enrichment is difficult to explain. It is possible that production of low enrichment N₂O was balanced by isotopic discrimination in N₂O reduction, resulting in no net change in the ¹⁵N enrichment of N₂O in the incubation. A further compounding factor at this piezometer was the occurrence of significant gas bubbles, during the extraction of the dose water after its incubation. This gas had a negligible N₂O content but a considerable CH₄ concentration. In theory it is possible that the gas bubble presence caused an error in the calculations of V, but had this been the case the results for the tracer (e.g. Br⁻ would have been erroneous and this was not the case). We do not believe that this particular result draws the method into question since another eight piezometers were successfully sampled providing data that was interpreted in a sensible and logical fashion. However, further field work is required to fully understand the processes at site B, replicate 3.

Our CH₄ data suggest that conditions are sufficiently anaerobic at site B to support production of this important GHG. At site A, ambient groundwater concentrations of CH₄ were relatively low and there was no change over the course of the incubation. However, at site B, the process of SF₆ labeling stripped out the high ambient CH₄ concentrations in the dose water so that when the dose water was injected at the start of the incubation there was a large differential between the CH₄ concentration in the dose water and the ambient groundwater. The increase in dissolved CH₄ concentration in the pulled water samples (Fig. 5) was likely driven by diffusion of CH₄ from the surrounding groundwater matrix. The differences in CH₄ dynamics between sites A and B are consistent with the differences in ambient DO levels between the sites and support the results showing that some piezometers at site B are located in denitrification hotspots (Yu & Patrick, 2004).

A previous study in the fringe area of site A recorded a denitrification rate of 2 µg NO₃⁻N kg⁻¹ soil day⁻¹ following the addition of NO₃⁻ (Addy *et al.*, 2002), while a previous study at site B has measured much higher but more variable rates of NO₃⁻ denitrification (61–40 µg NO₃⁻N kg⁻¹ soil day⁻¹ at 65 cm depth, (Kellogg *et al.*, 2005). However, these previous studies did not present information on the relative production of N₂O and N₂ production during denitrification. While the relative N₂O reduction rates in the present study are consistent with these previous studies (site B higher than site A), the rate of N₂O reduction that we measured at site B is much lower than the total denitrification rates measured in the previous study. The magnitude of the N₂O reduction rates that we measured are also considerably lower than rates measured in

surface soils. Hénault *et al.* (2001) reported a lag phase of 48 h in a gley soil before N₂O was reduced, with measured N₂O reduction rates from a variety of soils that were >3360 µg N kg⁻¹ soil day⁻¹ while Blackmer & Bremner (1976) measured N₂O consumption rates >570 µg N kg⁻¹ soil day⁻¹. A possible reason for the low N₂O reduction rates that we observed could be the time required for the denitrifying community to generate N₂O reductase. Although there were ambient levels of N₂O present in our sites, the higher concentrations injected with the dose water may not have been able to be immediately processed by the denitrifier community. Other studies have shown the denitrification enzymes and communities to be highly responsive to factors such as the temperature and water regime and carbon availability (Chèneby *et al.*, 1998; Hénault *et al.*, 2001) and in some instances denitrification may reduce NO₃⁻ in preference to N₂O. Previous studies have observed significant lag times between addition of NO₃⁻ and denitrification activity (Aelion & Shaw, 2000; Addy *et al.*, 2002). A similar lag may also occur for N₂O. If so, it may be necessary to expose the peizometers to elevated N₂O to condition the microbes to record true potential N₂O reduction rates.

The divergence of the conservative tracers at site B, replicates 2 and 3, could possibly have been due to the relative physical states of the tracers and their respective interactions with the soil-groundwater matrix. It is possible that the peizometers at replicates 2 and 3 were in a soil matrix that was less dense or denser than the other peizometers. Thus, the resulting physical turbulence or mixing of the dose water with the groundwater may have resulted in the gas tracer behaving differently to the anion tracer as a result of varying pressure during injection.

Further modifications of this method are possible to facilitate measurement of N₂O dynamics at multiple sites. While we used highly enriched ¹⁵N₂O, the use of N₂O that is closer to levels of natural abundance ¹⁵N enrichment could be used if there was a sufficient difference between the ¹⁵N enrichment of any dissolved ambient N₂O and the N₂O supplied in the dose water. When ambient N₂O concentrations are low, it may even be possible to use commercially manufactured N₂O, with a sufficiently different ¹⁵N signature from that of the ambient dissolved N₂O, so that the dose water could be simultaneously labeled with SF₆ and N₂O by bubbling a tank-gas mixture of these gases through the dose water for a suitable period. While we have used a 2 L dose water volume there is the potential for a greater volume of N₂O labeled dose water to be used (e.g. 10 L as used by Addy *et al.*, 1999). This would allow the integration of N₂O dynamics to occur over a greater volume of soil and reduce the potential impact of

ambient groundwater diffusing into the dose plume. This could be achieved by replacing the flask holding the dose water with a gas impermeable bag. Then there would also be no requirement for the He gas, as the gas impermeable bag would deflate as the dose water was injected into the groundwater. A further modification could be the inclusion of a pressure gauge to note the pressure of the dose water as it is injected into the groundwater. This could indicate the relative densities of the soil matrix. Modified methods that allow for collection of data at multiple sites could allow for information on N₂O dynamics that could be scaled to address questions about the importance of these dynamics to IPCC inventories.

Acknowledgements

Financial assistance for T. J. C. in the form of the 'America/New Zealand Soil Science Professional Exchange Program Award,' a 'Trimble Agricultural Research Fellowship,' and a grant from the 'Lincoln University Foundation,' are gratefully acknowledged and without which this work would not have been possible. T. J. C. would also like to thank staff at both the University of Rhode Island and the Institute of Ecosystem Studies for useful discussions.

References

- Addy K, Gold AJ, Nowicki BL, McKenna J, Stolt M, Groffman P (2005) Denitrification capacity in a subterranean estuary below a Rhode Island (USA) fringing salt marsh. *Estuaries*, **28**, 896–908.
- Addy K, Kellogg DQ, Gold AJ, Groffman PM, Ferendo G, Sawyer C (2002) *In Situ* Push-Pull method to determine ground water denitrification in Riparian zones. *Journal of Environmental Quality*, **31**, 1017–1024.
- Addy KL, Gold AJ, Groffman PM, Jacinthe PA (1999) Ground water nitrate removal in subsoil of forested and mowed riparian buffer zones. *Journal of Environmental Quality*, **28**, 962–970.
- Aelion CM, Shaw JN (2000) Denitrification in South Carolina (USA) coastal plain aquatic sediments. *Journal of Environmental Quality*, **29**, 1696–1703.
- Blackmer JM, Bremner JM (1976) Potential of soils as a sink for atmospheric nitrous oxide. *Geophysical Research Letters*, **3**, 739–742.
- Chèneby D, Hartmann A, Hénault C, Topp E, Germon JC (1998) Diversity of denitrifying microflora and ability to reduce N₂O in two soils. *Biology and Fertility of Soils*, **28**, 19–26.
- Clough TJ, Bertram JE, Sherlock RR, Leonard RL, Nowicki BL (2006) Comparison of measured and EF5-r-derived N₂O fluxes from a spring-fed river. *Global Change Biology*, **12**, 352–363.
- Clough TJ, Sherlock RR, Rolston DE (2005) A review of the movement and fate of N₂O in the subsoil. *Nutrient Cycling in Agroecosystems*, **72**, 3–11.

- Davidson EA, Firestone MK (1988) Measurement of nitrous oxide dissolved in soil solution. *Soil Science Society of America Journal*, **52**, 1201–1203.
- Friedman L, Bigeleisen J (1950) Oxygen and nitrogen isotope effects in the decomposition of ammonium nitrate. *The Journal of Chemical Physics*, **18**, 1325–1331.
- Groffman PM, Gold AJ, Kellogg DQ, Addy K (2002) Mechanisms, rates and assessment of N₂O in groundwater, riparian zones and rivers. In: *Non-CO₂ Greenhouse Gases: Scientific Understanding, Control Options and Policy Aspects. Proceedings of the Third International Symposium, Maastricht, the Netherlands* (eds van Ham J, Baede APM, Guicherit R, Williams-Jacobse JGFM), pp. 159–166. Millpress, Rotterdam.
- Hénault C, Chèneby D, Heurlier K, Garrido F, Perez S, Germon JC (2001) Laboratory kinetics of soil denitrification are useful to discriminate soils with potentially high levels of N₂O emission on the field scale. *Agronomie*, **21**, 713–723.
- Istok JD, Humphreya MD, Schrotha MH, Hymanb MR, O'Reilly KT (1997) Single-well, "Push-Pull" test for in situ determination of microbial activities. *Ground Water*, **35**, 619–631.
- Kellogg DQ, Gold AJ, Groffman PM, Addy K, Stolt MH, Blazejewski G (2005) In situ ground water denitrification in stratified, permeable soils underlying riparian wetlands. *Journal of Environmental Quality*, **34**, 524–533.
- Kroeze C, Van Faassen HG, De Ruiter PC (1989) Potential denitrification rates in acid soils under pine forest. *Netherland Journal of Agricultural Science*, **37**, 345–354.
- Mei L, Yang L, Wang D, Yin B, Hu J, Yin S (2004) Nitrous oxide production and consumption in serially diluted soil suspensions as related to in situ N₂O emission in submerged soils. *Soil Biology and Biochemistry*, **36**, 1057–1066.
- Moore WS (1999) The subterranean estuary: A reaction zone of ground water and sea water. *Marine Chemistry*, **65**, 111–125.
- Mosier A, Kroeze C, Nevison C, Oenema O, Seitzinger S, Van Cleemput O (1998) Closing the global N₂O budget: nitrous oxide emissions through the agricultural nitrogen cycle – OECD/IPCC/IEA phase ii development of IPCC guidelines for national greenhouse gas inventory methodology. *Nutrient Cycling in Agroecosystems*, **52**, 225–248.
- Nevison C (2000) Review of the IPCC methodology for estimating nitrous oxide emissions associated with agricultural leaching and runoff. *Chemosphere – Global Change Science*, **2**, 493–500.
- Reay DS, Smith KA, Edwards AC (2003) Nitrous oxide emission from agricultural drainage waters. *Global Change Biology*, **9**, 195–203.
- Soil Survey Staff. (1998) *Keys to Soil Taxonomy*, 8th edn. US Government Printing Office, Washington, DC.
- Stevens RJ, Laughlin RJ, Atkins GJ, Prosser SJ (1993) Automated determination of nitrogen-15 labelled dinitrogen and nitrous oxide by mass spectrometry. *Soil Science Society of America Journal*, **57**, 981–988.
- Weiss RF, Price BA (1980) Nitrous oxide solubility in water and seawater. *Marine Chemistry*, **8**, 347–359.
- Wilhelm E, Battino R, Wilcock RJ (1977) Low-pressure solubility of gases in liquid water. *Chemical Reviews*, **77**, 219–262.
- Yu KW, Patrick WH (2004) Redox window with minimum global warming potential contribution from rice soils. *Soil Science Society of America Journal*, **68**, 2086–2091.